

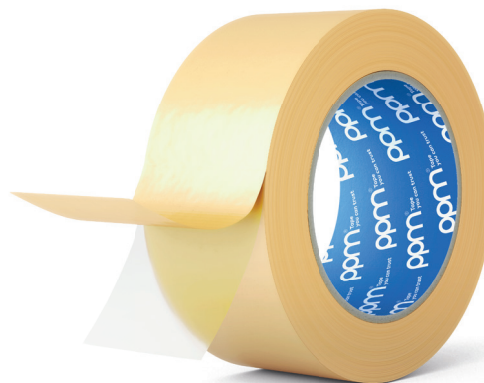
**Technical Data Sheet**

Date of Issue 11/10/2016

Rev. 04\_11/01/2021

# 8030

## General Purpose Double-Sided Film Tape

**Product Description**

General purpose grade, high - adhesion double-sided film tape characterized by a BOPP carrier, a siliconized paper liner and a synthetic rubber resin solvent free adhesive. With good tack, it is suitable for core start-ups, non - critical splicing, holding, attaching, mounting, and laminating applications on flat surfaces. Not hand tearable.

**Features**

- High adhesion
- Not hand tearable
- Excellent contact on flat surfaces

**Main Applications**

- Non - critical laminating, splicing and attaching
- Flooring
- Light - medium weight material mounting

**Technical Data**

	Metric	Imperial Units	Test Method
Total weight*	86 g/m <sup>2</sup>	86 g/m <sup>2</sup>	ISO 536
Total thickness*	89 µm	3.5 mils	Internal
MD tensile strength*	47 N/cm	26.8 Lbs/in	AFERA 5004/PSTC 131
MD elongation at break*	160 %	160 %	AFERA 5004/PSTC 131
Adhesion to steel plate*	9 N/cm	82.2 oz/in	AFERA 5001/PSTC 101

**Carrier**

30my bi-axially oriented clear polypropylene

**Liner**

80 gr/sqm two sides siliconized paper

**Type of adhesive**

Synthetic rubber resin - solvent free

\*Typical value

**Available colour**

Brown Yellow

**Technical Information and Product Use**

All technical information and data above mentioned are provided to the best of our knowledge on the basis of our practical experience. Figures shown refer to average values only, based on tests carried out in conditioned laboratory and are not valid for specification. The company reserves the right to modify or change the products at any time without notice. The accuracy or completeness of such information is not guaranteed. The technical information, suggestions and other statements contained in this document have been compiled for your guidance and usage. PPM Industries reminds the user of the products to make sure that the product is used as per the instructions and suggestions provided. It is the user's sole responsibility to determine the suitability of the product in actual application under specific conditions.

**Storage and Shelf Life**

Suggested storage in dry area away from direct sunlight temperature should range from 59°F / 15°C to 77°F / 25°C with max relative humidity of 50%. Tape and jumbo roll should be used respectively within 12 months and 6 months from date of shipment. PPM Industries does not take responsibility for the defective material if is not stored and used in accordance with the conditions listed above.